

NASA Contractor Report 4214

FLEXAN (Version 2.0)
User's Guide

Scott S. Stallcup
Computer Sciences Corporation
Hampton, Virginia

Prepared for
Langley Research Center
under Contract NAS1-17999



National Aeronautics
and Space Administration

**Scientific and Technical
Information Division**

1989

Preface

This document describes the FLEXAN computer program, version 2.0. FLEXAN is an acronym for "Flexible Animation". FLEXAN animates three dimensional wireframe structural dynamics on the Evans & Sutherland PS300 graphics workstation with a VAX/VMS host computer. FLEXAN runs under VMS 4.5 or later and PS300 firmware version A3.V01 or later. The FLEXAN program does not model structures or calculate the dynamics of structures; it only animates data from other computer programs.

FLEXAN is based on the MODAN program developed by the Aerospace Corporation. MODAN animates unconstrained structural vibrational modes. FLEXAN animates unconstrained vibrational modes, mode time histories (multiple modes), delta time histories (modal and/or nonmodal deformations), color time histories (elements of the structure change colors through time), and rotational time histories (parts of the structure rotate through time). Concurrent color, mode, delta, and rotation time history animations are supported by FLEXAN.

FLEXAN was developed for the Spacecraft Analysis Branch, NASA Langley Research Center to aid in the study of the structural dynamics of spacecraft. A typical application of FLEXAN is the animation of a spacecraft undergoing structural stresses caused by thermal and vibrational effects. The animation displays the spacecraft shape distortions while the changing element colors represent temperature variations.

FLEXAN was written in VAX FORTRAN and is specific to the Evans and Sutherland PS300 family of graphics workstations. VAX FORTRAN and PS300 dependencies are reasonably well separated, but the program would require extensive changes if ported to another environment. FLEXAN was written specifically for the PS390 but there are no PS390 dependencies in the code.

PRECEDING PAGE BLANK NOT FILMED

Acknowledgements

The author would like to acknowledge a few individuals who contributed to the development of FLEXAN and this document. Thanks to Russ Criste (CSC), Jerry Plassman (CSC), John Davis (CSC), and Larry Rowell (SAB, NASA) who reviewed this document. John Davis also contributed many helpful suggestions during the development of FLEXAN. Special thanks to Larry Rowell for allowing me the time and the creative freedom to make FLEXAN possible.

PRECEDING PAGE BLANK NOT FILMED

Table of Contents

1.0	Introduction	1-1
2.0	Mathematical Model.....	2-1
2.1	Geometry.....	2-1
2.2	Animation	2-1
2.3	Delta History Animation.....	2-3
2.4	Mode Animation.....	2-3
2.5	Mode History Animation	2-4
2.6	Rotation History Animation.....	2-4
3.0	FLEXAN Execution.....	3-1
3.1	FLEXAN Command.....	3-1
3.2	Parameter Qualifiers	3-2
3.3	Command Qualifiers	3-3
3.4	Dials and Function Keys.....	3-4
4.0	File Formats	4-1
4.1	Geometry Files	4-2
4.2	Mode Shape Files	4-4
4.3	Delta History Files.....	4-5
4.4	Color History Files	4-6
4.5	Mode History Files.....	4-7
4.6	Rotation History Files	4-8
5.0	Examples.....	5-1
5.1	Example 1 - Geometry	5-2
5.2	Example 2 - Node & Element Numbers.....	5-3
5.3	Example 3 - Mode Animation	5-4
5.4	Example 4 - Mode History Animation.....	5-5
5.5	Example 5 - Delta / Color History Animation	5-6
5.6	Example 6 - Rotation / Color History Animation.....	5-7
5.7	Example Input Files.....	5-8
6.0	Hints and Final Comments.....	6-1
	References.....	R-1

PRECEDING PAGE BLANK NOT FILMED

1.0 Introduction

FLEXAN is a computer program that animates structural dynamics on an Evans & Sutherland PS300 graphics workstation with a VAX/VMS host. FLEXAN can display single natural modes of vibration, a mode time-history (multiple modes), or any general deformations of a flexible structure. Elements of a structure can be animated through color changes to reflect thermal information, stresses, etc. Selected parts of a structure can also be rotated through time. FLEXAN does not generate structural geometries or calculate any influences on structures; it only displays data generated from other computer programs.

A structure is represented on the PS300 as a three-dimensional wireframe object. Solid objects or raster representations are not supported. The VAX/VMS computer calculates the animation frames and sends them to the PS300. The PS300 displays these frames in real time with rotation, scaling, and translation provided by the dials of the PS300. The PS300 is not a true real time machine, but it does provide a very close approximation. The animation can be displayed forward or backward at one to fifty frames per second or stepped one frame at a time. The animation speed is controlled by a dial and two function keys. Other function keys toggle on and off various parts of the display or enable different views of the structure.

FLEXAN is capable of animating two independent sets of data in separate windows on the PS300. An optional third window displays a superposition of the two datasets. This capability is useful for displaying the differences between design iterations, or analytical versus experimental datasets.

2.0 Mathematical Model

This section explains the mathematical model used by FLEXAN. Animations are described as a sequence of matrix operations. A basic understanding of matrix algebra is assumed.

2.1 Geometry

Structural geometry information is input through a *geometry file* as a matrix of nodes **A** and a matrix of elements **E**.

$$\mathbf{A} = \begin{bmatrix} a_{x1} & a_{y1} & a_{z1} \\ a_{x2} & a_{y2} & a_{z2} \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ a_{xp} & a_{yp} & a_{zp} \end{bmatrix} \quad \mathbf{E} = \begin{bmatrix} e_{m1} & e_{d1} \\ e_{m2} & e_{d2} \\ \cdot & \cdot \\ \cdot & \cdot \\ e_{mq} & e_{dq} \end{bmatrix}$$

Where: p = the number of nodes
 q = the number of elements.

Each row of **A** represents the undeformed location of a node point in three-dimensional space. Each row of **E** contains two integer row indices into **A** specifying the endpoints of an element (move and draw).

2.2 Animation

An animation consists of a sequence of frames; each frame f_i is displayed in rapid succession from frame f_1 to the last frame f_n .

$$f_1, f_2, f_3, \dots, f_n = \{f_i\}_{i=1,n}$$

Each frame contains the color values for each element and the absolute coordinates of each node point. The deformed node point data and color values are input through data files. The program processes the matrices in the frame generation function \mathcal{F} .

$$f_i = \mathcal{F}(\mathbf{H}_i, \mathbf{E}, \mathbf{C}_i)$$

Where **E** is the matrix of elements, and **H** and **C** are described below. For an animation involving the geometry elements, color values are supplied in a *color history file*. This file contains a sequence of **C** matrices from frame f_1 to the last frame f_n .

$$\mathbf{C} = \begin{bmatrix} C_1 \\ C_2 \\ \cdot \\ \cdot \\ C_q \end{bmatrix} \quad \{\mathbf{C}_i\}_{i=1, n}$$

Matrix **C** contains the color information (real number values) corresponding to each element (row) in matrix **E**. FLEXAN maps the values into a range of continuous colors from blue through green, yellow, and red. A labeled color bar is also generated and displayed.

If no color history file is supplied, then the elements of the first dataset default to red for a single dataset animation or for dataset one of a two dataset animation. The elements of dataset two of a two dataset animation will be green.

For an animation involving deformed node points, four options are available: *mode animation*, *mode history animation*, *delta history animation*, and *rotation history animation*. The details of each option are explained later, but the result is a sequence of **H** matrices which contain the absolute node points for each frame f_1 to the last frame f_n .

$$\mathbf{H} = \begin{bmatrix} h_{x1} & h_{y1} & h_{z1} \\ h_{x2} & h_{y2} & h_{z2} \\ \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot \\ h_{xp} & h_{yp} & h_{zp} \end{bmatrix} \quad \{\mathbf{H}_i\}_{i=1, n}$$

Concurrent combinations of the animation options are possible. All concurrent combinations of mode history, delta history, color history, and rotation history animations are supported by FLEXAN. Mode animations cannot be animated concurrently with any other animation option.

2.3 Delta History Animation

The simplest and most general node point deformation animation is a delta history animation. A *delta history file* is supplied which contains a sequence of **D** matrices for frame f_1 to frame f_n . Each \mathbf{D}_i contains the relative translations or "Deltas" for each node point in the geometry.

$$\mathbf{D} = \begin{bmatrix} d_{x1} & d_{y1} & d_{z1} \\ d_{x2} & d_{y2} & d_{z2} \\ \vdots & \vdots & \vdots \\ d_{xp} & d_{yp} & d_{zp} \end{bmatrix} \quad \{ \mathbf{D}_i \}_{i=1, n}$$

$$\{ \mathbf{H}_i = \mathbf{A} + \mathbf{D}_i \alpha \}_{i=1, n}$$

α = Amplitude scale factor (input on command line)

2.4 Mode Animation

A single, unconstrained vibrational mode can be animated using a sine wave function to drive the animation. A *mode shape file* is supplied which contains a sequence of matrices, where each matrix **M** contains the relative translation of each node point. The sequence of matrices represents mode 1 to the number of modes w . A frequency ω_k in hertz is supplied in the file for each mode. The frequency is displayed and the number of frames per second s is calculated and displayed.

$$\mathbf{M} = \begin{bmatrix} m_{x1} & m_{y1} & m_{z1} \\ m_{x2} & m_{y2} & m_{z2} \\ \vdots & \vdots & \vdots \\ m_{xp} & m_{yp} & m_{zp} \end{bmatrix} \quad \{ \mathbf{M}_k \}_{k=1, w}$$

$$\left\{ \mathbf{H}_i = \mathbf{A} + \mathbf{M}_k \sin\left(\frac{(i-1)2\pi}{z}\right) \alpha \right\}_{i=1, z} \quad s = (z) (\omega_k)$$

α = Amplitude scale factor (input on command line)

k = Selected mode to animate (input on command line)

z = Number of frames per cycle (input on command line)

2.5 Mode History Animation

An animation displaying the contribution of all modes in the mode shape file is generated by supplying a *mode history file* which contains a single matrix \mathbf{X} . This matrix contains the relative contribution of each mode across the rows from mode 1 to mode w . The contribution (damping) factors typically range from 0.0 to 1.0. Each column represents a single frame in the animation from f_1 to f_n .

$$\mathbf{X} = \begin{bmatrix} X_{11} & X_{21} & \dots & X_{n1} \\ X_{12} & X_{22} & \dots & X_{n2} \\ \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \dots & \cdot \\ \cdot & \cdot & \dots & \cdot \\ X_{1w} & X_{2w} & \dots & X_{nw} \end{bmatrix}$$

$$\left\{ \mathbf{H}_i = \mathbf{A} + \left(\sum_{k=1}^w \mathbf{M}_k X_{ik} \right) \alpha \right\}_{i=1,n}$$

α = Amplitude scale factor (input on command line)

2.6 Rotation History Animation

Rotation history animations involve the rotation of selected parts of a structure through time. The rotating parts of a structure are identified in the structural geometry input file. A rotation history file supplies the absolute rotation of each part relative to the undeformed geometry for each frame in the animation. The rotation matrix operations are well known and will not be discussed here¹.

¹ Refer to reference 1 of this document for a complete discussion of matrix rotation transformations.

3.0 FLEXAN Execution

All program input is through data files and command line parameters and qualifiers. Prompts are not generated during the execution of FLEXAN. The parameters and qualifiers define the input file names and animation options. FLEXAN reads the input files then generates and sends the animation frames to the PS300. FLEXAN execution ends on the VAX/VMS host computer when all frames have been sent to the PS300. The animation is then completely controlled by the PS300 using the labeled dials and function keys. The FLEXAN command follows the VAX/VMS command conventions concerning parameters and qualifiers. Consult the VMS documentation for more information on the VMS commands and the Evans & Sutherland PS300 documentation on the operation of the PS300.

The frame calculation and download time can last several minutes. As frames are downloaded, a progress "Thermometer" is displayed on the PS300 screen. When all of the frames are downloaded the thermometer disappears and the animation begins.

Press the <shift> <line_local> keys of the PS300 to get into local mode. In local mode the animation can be controlled using the dials and function keys. Press <line_local> to get into the VAX/VMS terminal emulation mode.

3.1 FLEXAN Command

FLEXAN can be run from any terminal type but the graphics must be sent to a PS300 workstation. The /DEVICE qualifier described below may be used to choose a particular PS300 device. The default PS300 device is installation dependent. FLEXAN is executed by issuing the FLEXAN command :

\$ FLEXAN *geo1 geo2*

The two parameters *geo1* and *geo2* are the file-specifications for the geometry files. *Geo1* is required and *geo2* is optionally used for a two dataset animation. The default file extension is ".GEO".

3.2 Parameter Qualifiers

Qualifiers on each parameter specify the animation options for the respective datasets. If no parameter qualifiers are present, then the undeformed geometry is sent to the PS300 with no animation frames.

/MS = Mode-shape-file-spec

Specifies a mode shape file to be used for a mode animation or a mode history animation. The default file extension is ".MOD". The presence of this qualifier requires the presence of the **/AMP** and either **/MODE** or **/MH** qualifiers. If no file-spec is supplied with this qualifier, then the geometry file name with ".MOD" extension is implied.

/MH = Mode-history-file-spec

Specifies a mode history animation. The default file extension is ".MHY". If no file-spec is supplied with this qualifier, then the geometry file name with ".MHY" extension is implied.

/DH = Delta-history-file-spec

Specifies a delta history animation. The default file extension is ".DHY". The presence of this qualifier requires the presence of the **/AMP** qualifier. If no file-spec is supplied with this qualifier, then the geometry file name with ".DHY" extension is implied.

/CH = Color-history-file-spec

Specifies a color history animation. The default file extension is ".CHY". If no file-spec is supplied with this qualifier, then the geometry file name with ".CHY" extension is implied.

/RH = Rotation-history-file-spec

Specifies a rotation history animation. The default file extension is ".RHY". If no file-spec is supplied with this qualifier, then the geometry file name with ".RHY" extension is implied.

/MODE = Mode-number

Specifies a mode animation. *Mode-number* is the desired mode number (integer) from the mode shape file.

/AMP = Amplitude-scale-factor

Specifies an amplitude scale factor (positive real number) for mode, mode history, and delta history animations.

/CMIN = Minimum-color

Specifies a minimum color value (real number) for the color mapping of a color history animation. The presence of this qualifier requires the presence of the ***/CH*** qualifier. The minimum color value in the color history file is used if this qualifier is not present.

/CMAX = Maximum-color

Specifies a maximum color value (real number) for the color mapping of a color history animation. The presence of this qualifier requires the presence of ***/CH***. The maximum color value in the color history file is used if this qualifier is not present.

3.3 Command Qualifiers

Command qualifiers affect both datasets if two datasets are animated and they can appear anywhere on the command line.

/Frames = Number-of-frames

Specifies the number of frames to animate for time history animations. If this qualifier is not present, then the number of frames is chosen to be the lowest number of frames specified in the time history file(s). For mode animations, this qualifier is required and refers to the *number of frames per cycle*. The maximum number of frames is 9999.

/Super

If two datasets are animated then this qualifier creates a third window which is a superposition of the two animations in the same window. If this qualifier is absent, then no superposition window is available (saves memory space).

/Device = Device-number

Specifies a PS300 device to be used for the animation. *Device-number* is an integer. The range of devices and the default for this qualifier is installation dependent.

3.4 Dials and Function Keys

There are eight dials and twelve function keys available on the PS300. This section lists the functions of the dials and function keys used by FLEXAN.

dial 1	Translates the structure(s) horizontally.
dial 2	Translates the structure(s) vertically.
dial 3	Translates the structure(s) in the z direction (depth).
dial 4	Scales the structure(s) in all three directions.
dial 5	Rotates structure(s) about the x axis.
dial 6	Rotates structure(s) about the y axis.
dial 7	Rotates structure(s) about the z axis.
dial 8	Controls the animation rate. (1...50 FPS)
fkey 1	Toggles start and stop of an animation.
fkey 2	Steps through frames one at a time.
fkey 3	Toggles the undeformed geometry (white).
fkey 4	Toggles the animation in the forward/backward directions.
fkey 5	Toggles the animation frames.
fkey 6	Toggles the information (amp, FPS, title, etc.).
fkey 7	Toggles the color bar (for color animations only).
fkey 8	Toggles the node numbers.
fkey 9	Toggles the element numbers.
fkey 10	Toggles the frame number.
fkey 11	Toggles the orientation axis.
fkey 12	Toggles through windows (for two dataset animations only).

4.0 File Formats

This section describes the text formats for the FLEXAN input files. The file formats were designed to integrate well with other programs at NASA Langley Research Center, but every effort was made to make them as easy to create and read as possible. All real or integer values are read by "list directed" read statements.

Each file type is described; then FORTRAN code fragments to read the file are presented. The code fragments represent the method used by FLEXAN to read each file (error checking code has been stripped out). Section 5.7 of this document contains a complete set of example files.

The first two lines of each file type have the same format. The first line is an 80-character title. The title is ignored in all file types except the geometry file type. The title of the geometry file is displayed at the top of the animation window(s). The first three columns of the second line must contain the default file extension for the respective file types. For example, geometry files must have "GEO" in the first three columns of line two.

4.1 Geometry Files

Example files are presented on pages 5-9 and 5-14. The first line is an 80-character title that is displayed across the top of the window for each dataset. The second line must contain the file type "GEO" in the first three columns. The third line must contain the integer number of nodes followed by the integer number of elements. The fourth line contains the number of rotating parts, the number of rotating part types, the starting element index number and the ending element index number for the main body of the structure.

Rotating part types are consecutive integers starting at one. Each rotating part in the structure has one or more rotating part types associated with it. Rotating part types are specified later in this file by supplying a point of rotation and an axis of rotation. Rotation history files (discussed in section 4.6) supply an angle or rotation for each rotation part type in each animation frame.

The next lines contain the node points (one node point per line). The first number on each line must be an integer node index starting at 1 increasing to the number of nodes (specified on line three). The next three numbers on each line are the X, Y, and Z coordinates (real numbers) of the node point. The node indexes must be consecutive; otherwise an error is generated. The node coordinates may be in any consistent cartesian system. FLEXAN will scale and translate the geometry to fit into the display window.

The next lines contain the element or connectivity information (one element per line). The first number on each line must be an integer element index starting at 1 increasing to the number of elements (specified on line three). The next two numbers on each line are the integer indexes of the node points which form the endpoints of an element. The element indexes must be consecutive; otherwise an error is generated.

The next lines contain the rotating part information. The first number must be an integer rotating part index starting at 1 increasing to the number of rotating parts (specified on line four). The number of rotating part types for the part is next, followed by the starting and then the ending element index numbers for the part. The next lines for each part contain the rotation part type number followed by "1", "2", or "3" for the axis of rotation "X", "Y", or "Z" respectively. The "XYZ" point of rotation ends the line.

The FORTRAN code fragment to read this file is:

CHARACTER*80	TITLE	File title
CHARACTER*3	FTYPE	File type
INTEGER	NNODES	Number of nodes
INTEGER	NELEM	Number of elements
INTEGER	NFRAMS	Number of frames
REAL	NODES(3,5000)	Nodes array
INTEGER	ELEMS(2,5000)	Elements array
INTEGER	NROT	Number of rotating parts
INTEGER	NROTYPE	Number of rotating part types
INTEGER	BODYS	Element index for start of main body
INTEGER	BODYE	Element index for end of main body
INTEGER	NRTYP(100)	Number of rotating part types array
INTEGER	RINDS(100)	Element indexes for start of parts
INTEGER	RINDE(100)	Elements indexes for end of parts
INTEGER	RTYPE(100,100)	Rotation part type numbers
INTEGER	RAXIS(100,100)	Rotation axis numbers
REAL	RP(3,100,100)	Rotation points
.	.	.
.	.	.
200	READ(2,200) TITLE	
201	READ(2,201) FTYPE	
	FORMAT(A80)	
	FORMAT(A3)	
	READ(2,*) NNODES, NELEM	
	READ(2,*) NROT, NROTYPE, BODYS, BODYE	
	DO 100 I = 1, NNODES	
	READ(2,*) N, NODES(1,I), NODES(2,I), NODES(3,I)	
100	CONTINUE	
	DO 110 I = 1, NELEM	
	READ(2,*) N, ELEMS(1,I), ELEMS(2,I)	
110	CONTINUE	
	DO 120 I=1, NROT	
	READ(2,*) N, NRTYP(I), RINDS(I), RINDE(I)	
	DO 130 J=1, NRTYP(I)	
	READ(2,*) RTYPE(I,J), RAXIS(I,J),	
	RP(1,I,J), RP(2,I,J), RP(3,I,J)	
130	CONTINUE	
120	CONTINUE	
.	.	.
.	.	.
.	.	.

4.2 Mode Shape Files

An example file is presented on page 5-10. The first line is an 80-character title which is ignored by the program. The second line must contain the file type "MOD" in the first three columns. The third line must contain the integer number of modes followed by the integer number of nodes.

The next lines contain the sequence of modes from mode 1 to the number of modes (specified on line three). The first line of each mode must contain the integer mode number followed by the real number frequency of the mode in Hertz. On each of the following lines of the mode there must be an integer node index starting at 1 increasing to the number of nodes (specified on line three). The next three numbers on each line of the mode are the X, Y, and Z translations (real numbers) of the node point. The node indexes must be consecutive; otherwise an error is generated. The node translations must be in the same coordinate system as used by the geometry file. An error is generated if the number of nodes in this file is not equal to the number of nodes in the geometry file.

The FORTRAN code fragment to read this file is:

CHARACTER*80	TITLE	File title
CHARACTER*3	FTYPE	File type
INTEGER	NNODES	Number of nodes
INTEGER	NMODES	Number of modes
REAL	FREQS(1000)	Frequency array
REAL	MDEL(3,5000)	Mode shape array
.		
.		
.		
	READ(2,200) TITLE	
	READ(2,201) FTYPE	
200	FORMAT(A80)	
201	FORMAT(A3)	
	READ(2,*) NMODES,NNODES	
	K = 0	
	DO 100 I = 1, NMODES	
	READ(2,*) N, FREQS(I)	
	DO 110 J = 1, NNODES	
	K = K + 1	
	READ(2,*) N, MDEL(1,K), MDEL(2,K), MDEL(3,K)	
110	CONTINUE	
100	CONTINUE	
.		
.		
.		

4.3 Delta History Files

An example file is presented on page 5-13. The first line is an 80-character title which is ignored by the program. The second line must contain the file type "DHY" in the first three columns. The third line must contain the integer number of frames in the history followed by the integer number of nodes in the corresponding geometry file. The fourth line must contain the real number of frames per second (FPS) the history represents. The FPS is displayed as a label on the screen and serves only as a guide for determining the display real time ratio. This value should be 0.0 if the FPS is unknown or undefined.

A FORTRAN "implied do loop" is used to read the rest of the file so that the lines or records can be any length desired but the real number delta values must appear in the correct order. The following pseudo-code defines the order of the delta values:

```
do i = 1 to the number of frames
  do j = 1 to the number of nodes
    do k = 'x' to 'y'
      write the delta value for frame i , node j , coordinate k
    end do
  end do
end do
```

The delta values are the absolute translation of each node point relative to the undeformed geometry. The number of nodes in this file must be equal to the number of nodes in the geometry file and the node translations must be in the same coordinate system used by the geometry file.

The FORTRAN code fragment to read this file is:

CHARACTER*80	TITLE	File title
CHARACTER*3	FTYPE	File type
INTEGER	NNODES	Number of nodes
INTEGER	NFRAMS	Number of frames
REAL	FPS	Number of frames per second
REAL	DELTAS (3, 500000)	Delta array
.		
.		
.		
200	READ (2, 200) TITLE	
201	READ (2, 201) FTYPE	
200	FORMAT (A80)	
201	FORMAT (A3)	
	READ (2, *) NFRAMS, NNODES	
	READ (2, *) FPS	
	INUM = NFRAMS * NNODES	
	READ (2, *) ((DELTAS (K, J), K=1, 3), J = 1, INUM)	
.		
.		
.		

4.4 Color History Files

Example files are presented on pages 5-11 and 5-16. The first line is an 80-character title which is ignored by the program. The second line must contain the file type "CHY" in the first three columns. The third line must contain the integer number of frames in the history followed by the integer number of elements in the corresponding geometry file. The fourth line must contain the real number of frames per second (FPS) the history represents. The FPS is displayed as a label on the screen and serves only as a guide for determining the display real time ratio. This value should be 0.0 if the FPS is unknown or undefined. The fifth line must contain the left justified characters of the color value units (maximum of ten characters) starting in column one. The units are not used in any calculations, but is displayed at the bottom of the labeled color bar.

A FORTRAN "implied do loop" is used to read the rest of the file so that the lines or records can be any length desired but the real number color values must appear in the correct order. The following pseudo-code defines the required order of the color values:

```
do i = 1 to the number of frames
  do j = 1 to the number of elements
    write the color value for frame i , element j
  end do
end do
```

The color values may span any range of real numbers desired. FLEXAN determines the maximum and minimum color values and maps the range to the color system of the PS300. The number of geometry elements in this file must be equal to the number of geometry elements in the geometry file.

The FORTRAN code fragment to read this file is:

CHARACTER*80	TITLE	File title
CHARACTER*3	FTYPE	File type
CHARACTER*10	UNITS	Color units
INTEGER	NELEM	Number of elements
INTEGER	NFRAMS	Number of frames
REAL	FPS	Number of frames per second
REAL	COLORS (500000)	Colors array
.		
.		
	READ (2,200) TITLE	
	READ (2,201) FTYPE	
200	FORMAT (A80)	
201	FORMAT (A3)	
	READ (2,*) NFRAMS,NELEM	
	READ (2,*) FPS	
	READ (2,202) UNITS	
202	FORMAT (A10)	
	INUM = NFRAMS * NELEM	
	READ (2,*) (COLORS (J), J = 1, INUM)	

4.5 Mode History Files

An example file is presented on page 5-12. The first line is an 80-character title which is ignored by the program. The second line must contain the file type "MHY" in the first three columns. The third line must contain the integer number of frames in the history followed by the integer number of modes in the corresponding mode shape file. The fourth line must contain the real number of frames per second (FPS) the history represents. The FPS is displayed as a label on the screen and serves only as a guide for determining the display real time ratio. This value should be 0.0 if the FPS is unknown or undefined.

A FORTRAN "implied do loop" is used to read the rest of the file so that the lines or records can be any length desired but the real number mode contribution values must appear in the correct order. The following pseudo-code defines the order of the values:

```
do i = 1 to the number of frames
  do j = 1 to the number of modes
    write the mode contribution value for frame i , mode j
  end do
end do
```

The values are the contribution of each mode for each frame. Typically the values range from 0.0 to 1.0. The number of modes in this file must be equal to the number of modes in the mode shape file.

The FORTRAN code fragment to read this file is:

CHARACTER*80	TITLE	File title
CHARACTER*3	FTYPE	File type
INTEGER	NMODES	Number of modes
INTEGER	NFRAMS	Number of frames
REAL	FPS	Number of frames per second
REAL	DAMPS(500000)	Mode history damping array
.		
.		
.		
	READ(2,200) TITLE	
	READ(2,201) FTYPE	
200	FORMAT(A80)	
201	FORMAT(A3)	
	READ(2,*) NFRAMS,NMODES	
	READ(2,*) FPS	
	INUM = NFRAMS * NMODES	
	READ(2,*) (DAMPS(J), J = 1, INUM)	
.		
.		
.		

4.6 Rotation History Files

An example file is presented on page 5-15. The first line is an 80-character title which is ignored by the program. The second line must contain the file type "RHY" in the first three columns. The third line must contain the integer number of frames in the history followed by the integer number of rotating part types in the corresponding geometry file. The fourth line must contain the real number of frames per second (FPS) the history represents. The FPS is displayed as a label on the screen and serves only as a guide for determining the display real time ratio. This value should be 0.0 if the FPS is unknown or undefined.

A FORTRAN "implied do loop" is used to read the rest of the file so that the lines or records can be any length desired but the real number rotation values must appear in the correct order. The following pseudo-code defines the order of the values:

```
do i = 1 to the number of frames
  do j = 1 to the number of rotating part types
    write the angle for frame i , rotating part type j
  end do
end do
```

The values are the absolute rotation angle in degrees of each rotating part type relative to the undeformed geometry.

The FORTRAN code fragment to read this file is:

	CHARACTER*80	TITLE	File title
	CHARACTER*3	FTYPE	File type
	INTEGER	NRTYPS	Number of rotating part types
	INTEGER	NFRAMS	Number of frames
	REAL	FPS	Number of frames per second
	REAL	ROTS (500000)	Rotations array
	.		
	.		
	.		
	READ (2,200)	TITLE	
	READ (2,201)	FTYPE	
200	FORMAT (A80)		
201	FORMAT (A3)		
	READ (2,*)	NFRAMS, NRTYPS	
	READ (2,*)	FPS	
	INUM =	NFRAMS * NRTYPS	
	READ (2,*)	(ROTS (J), J = 1, INUM)	
	.		
	.		
	.		

5.0 Examples


This section presents six example FLEXAN runs. The examples use the sample data files provided on the FLEXAN distribution tape. Fragments of these files are presented in section 5.7. Five of the examples use a simplified antenna structure under study at NASA Langley Research Center. The last example is a simplified "generic" satellite model with rotating solar arrays. Unfortunately the PS300 screen pictures in this document are black and white. The undeformed geometries are displayed in black (white on the PS300). The animation frame geometries are also shown here in black (red or green on the PS300). Color history animations are shown here with all black elements and a solid black color bar. The PS300 uses "depth cueing"; objects grow dimmer as the object's distance increases from the eye. Depth cueing is not preserved in these pictures.

Each of the following example runs contains a description followed by the corresponding command line and then a PS300 screen picture. Each animation window shown here displays the frame number of the "still" picture from the animation. The "Frames/sec" section shows the FPS of the dataset and the current display FPS selected by dial number 8 on the PS300.

5.1 Example 1 - Geometry

The screen picture below shows FLEXAN's ability to display a simple undeformed geometry with no animation. The geometry file is "TEST.GEO" in the current default directory.


\$ FLEXAN TEST

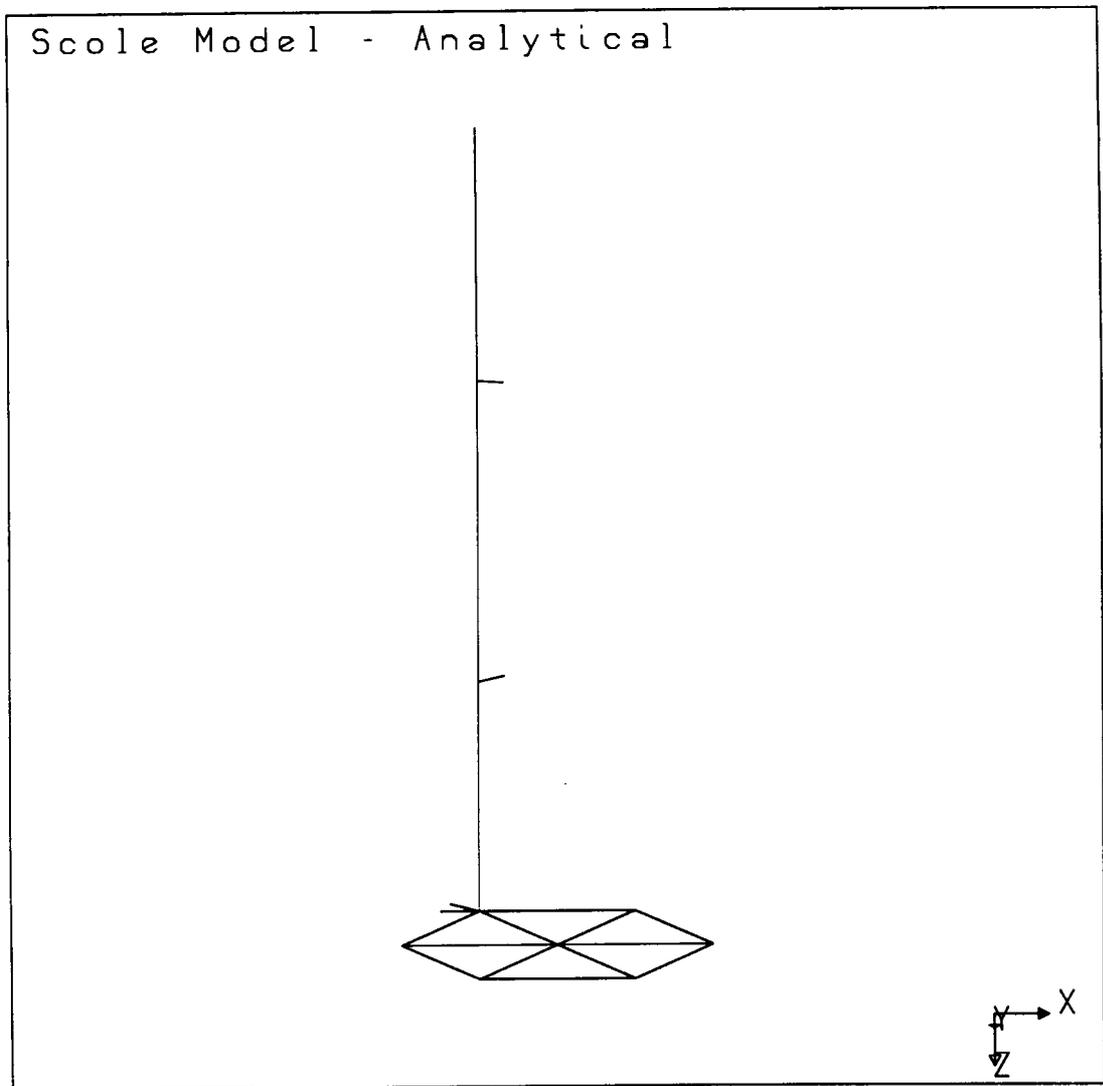

5.2 Example 2 - Node & Element Numbers

The screen picture below displays FLEXAN's ability to display node numbers and element numbers. The FLEXAN command is the same as example 1. The function keys for node and element numbers were toggled to make this picture.


\$ FLEXAN TEST

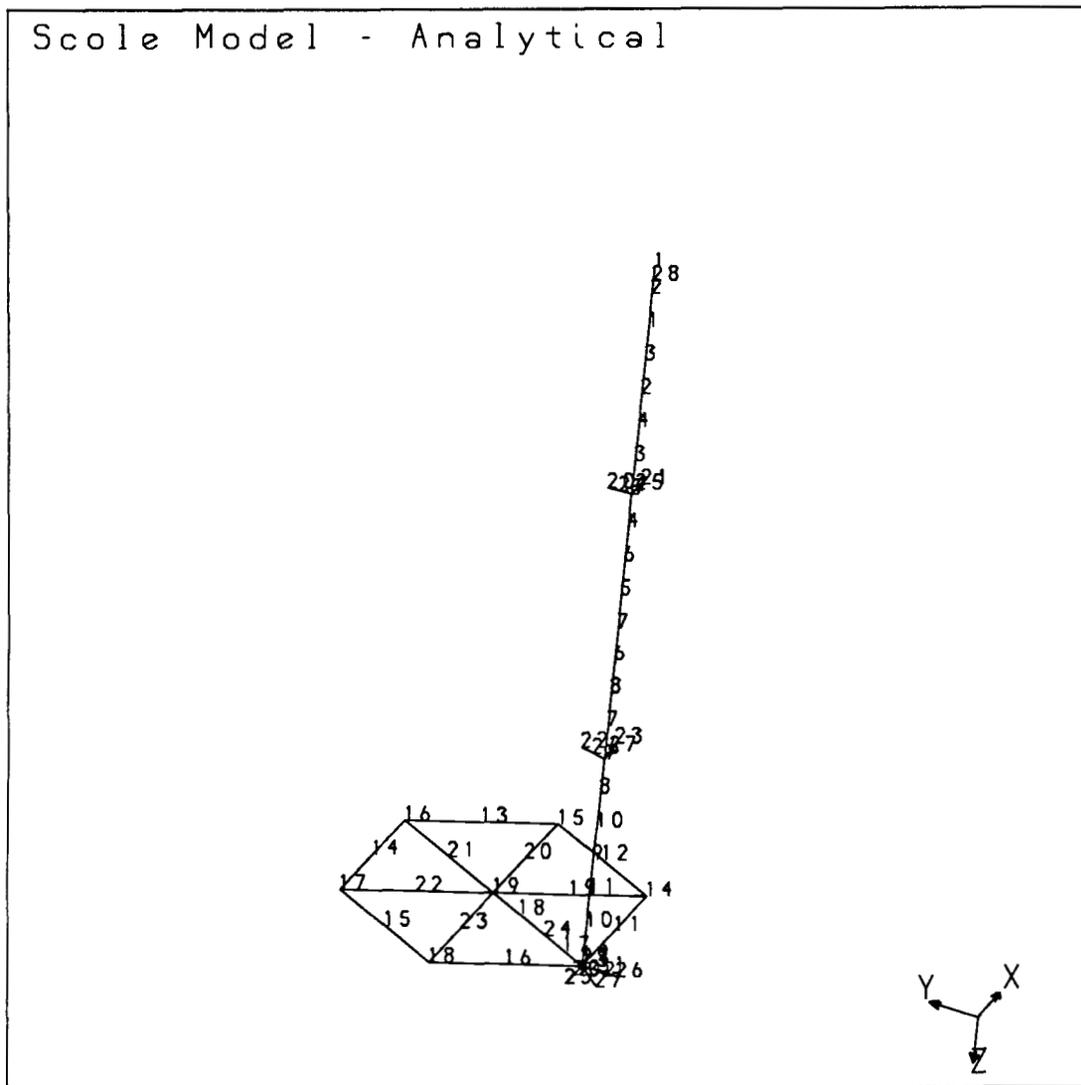

5.3 Example 3 - Mode Animation

The screen picture below displays frame 21 of a mode animation of mode #2 with an amplitude scale factor of 3.4. The undeformed geometry is also shown. The number of frames per cycle is 25.


```
$ FLEXAN/FRAMES=25 -  
TEST/MS=TEST.MOD/MODE=2/AMP=3.4
```

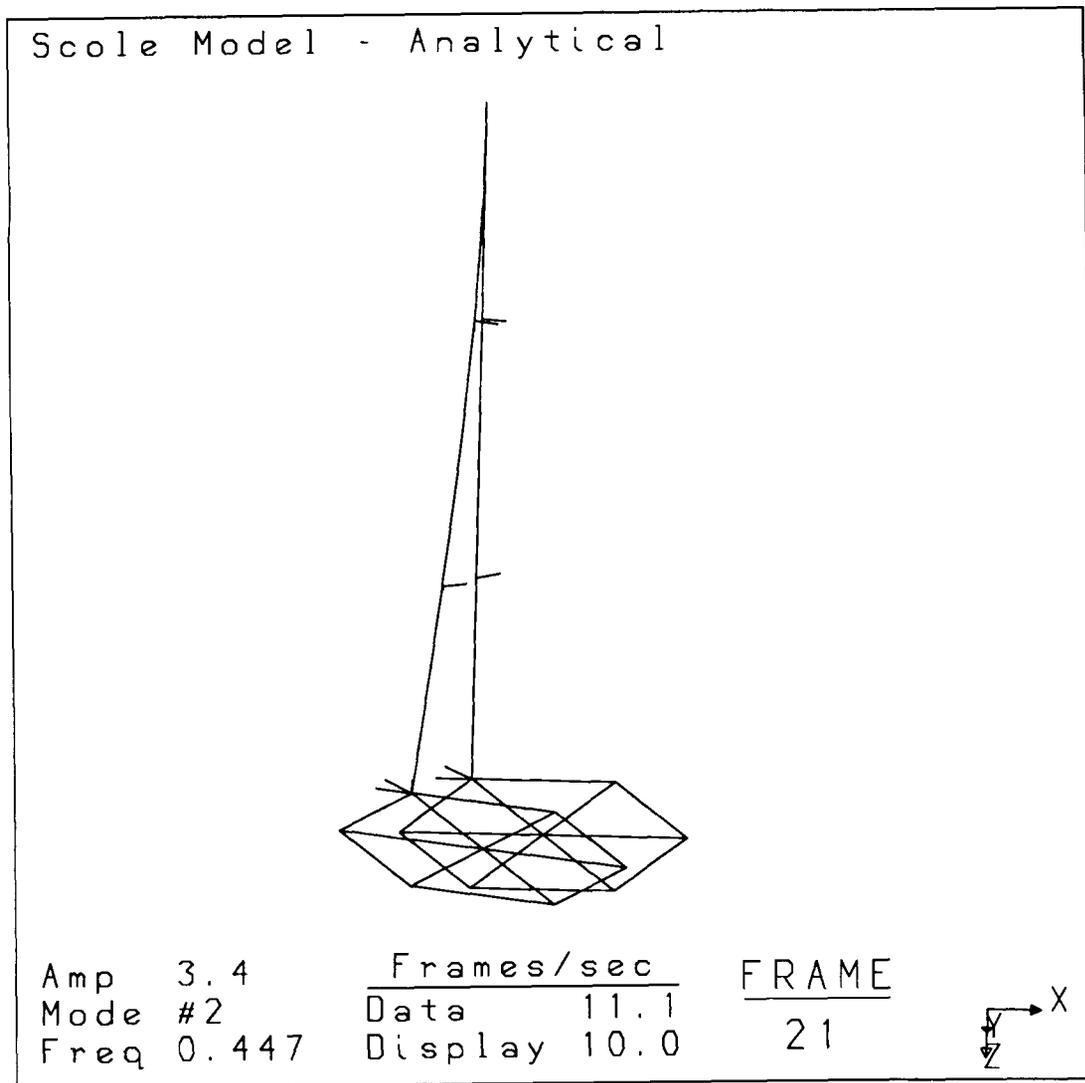

5.4 Example 4 - Mode History Animation

The screen picture below displays frame 5 of a mode history animation with an amplitude scale factor of 3.2. The undeformed geometry is also shown. The number of frames defaults to the number of frames in the mode history file; 600.

\$ FLEXAN TEST/MS=TEST/MH=TEST/AMP=3.2

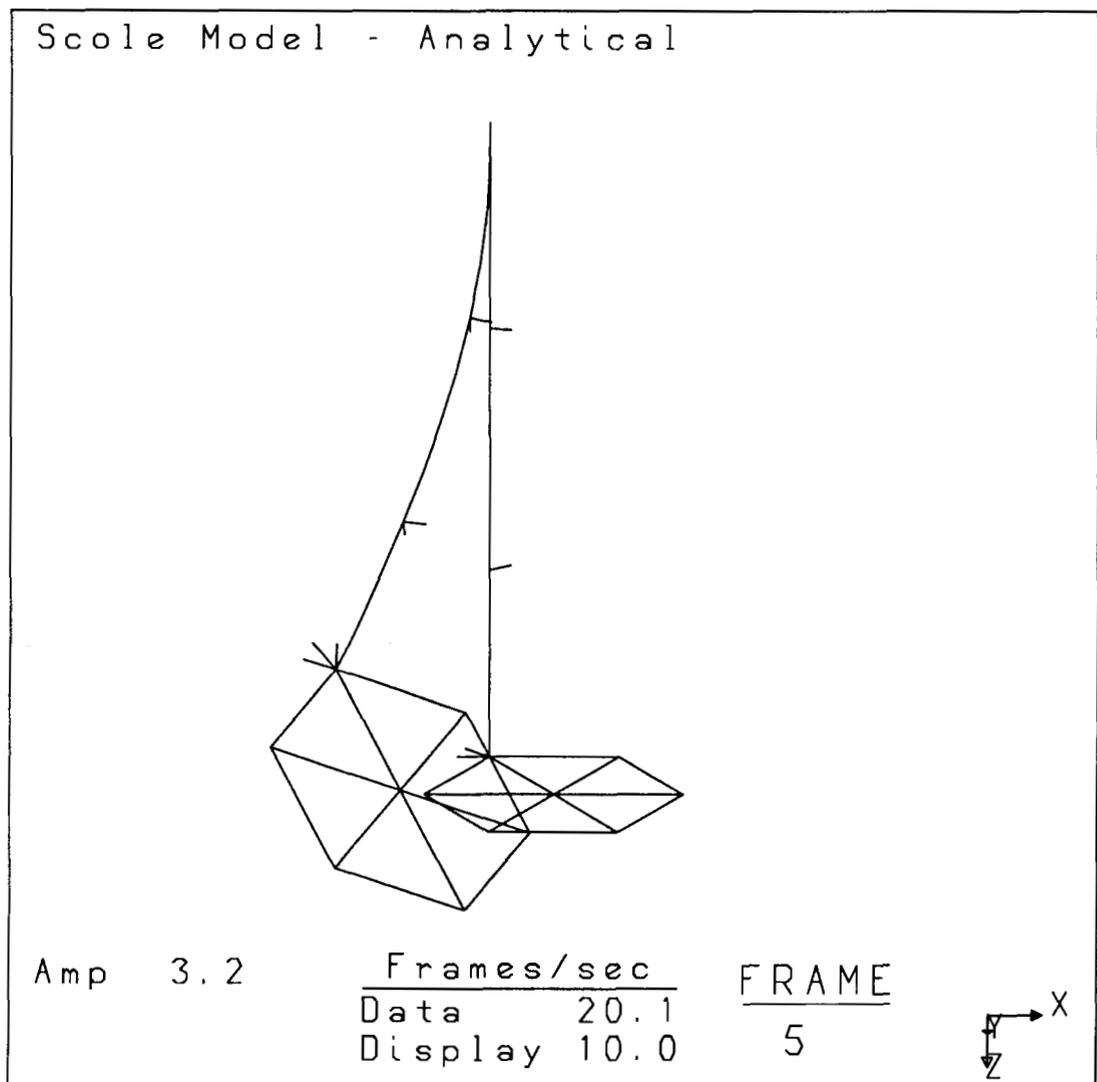


5.5 Example 5 - Delta / Color History Animation

The screen picture below displays frame 21 of a two dataset animation with a superposition window. The number of frames is chosen to be 400. Dataset one is a delta history animation with an amplitude scale factor of 3.2. Dataset two is a color history and a delta history animation with a scale factor of 4.5.

```


$ FLEXAN/FRAMES=400/SUPER -
  TEST/DH=TEST/AMP=3.2 -
  TEST/DH=TEST/CH=TEST/AMP=4.5
  
```

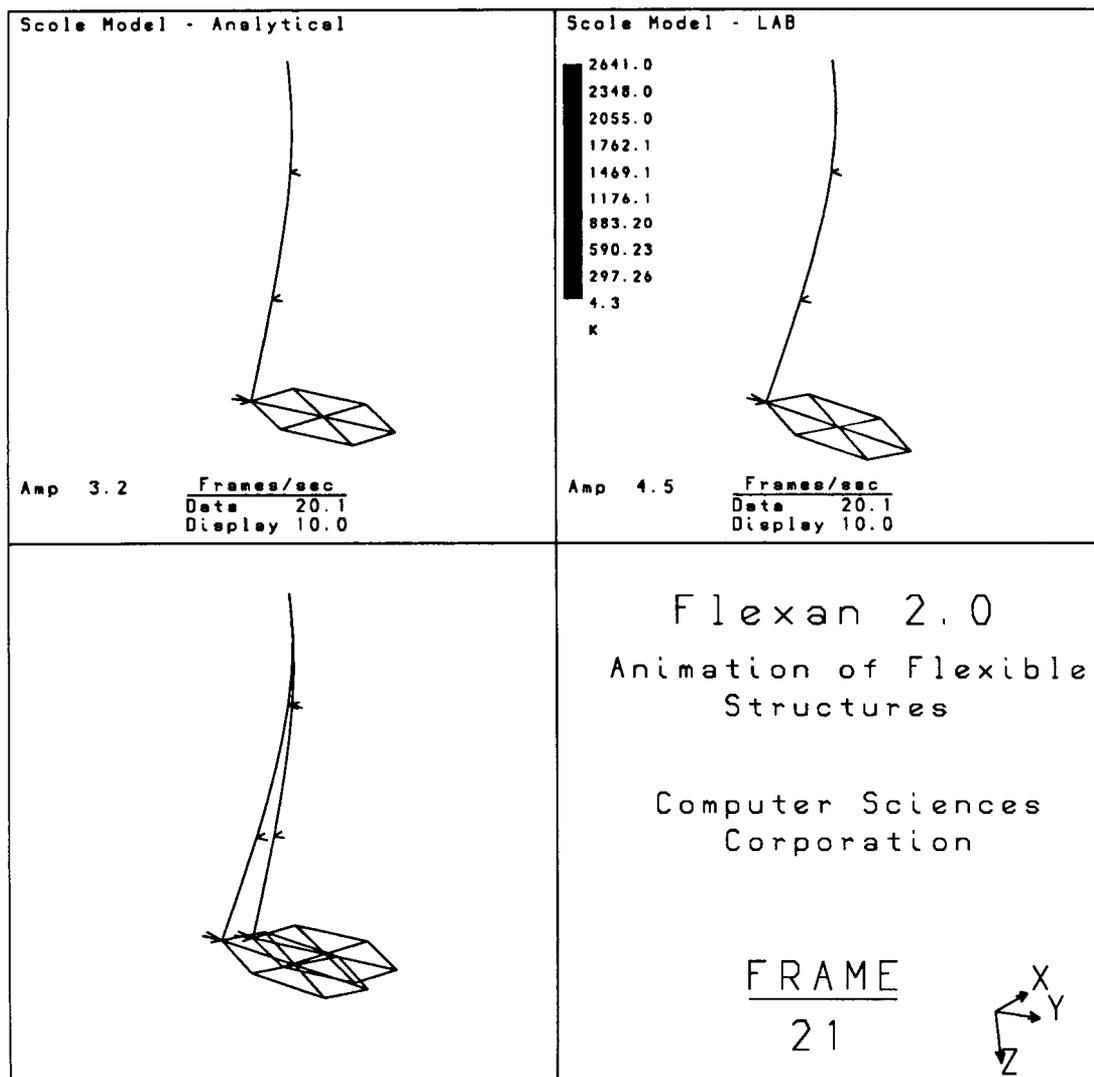

5.6 Example 6 - Rotation / Color History Animation

The screen picture below displays frame 3 of a rotation and color history animation. Note the inheritance of file names from the geometry file name. The files read are GEN.GEO, GEN.RHY, and GEN.CHY.

\$ FLEXAN GEN/RH/CH

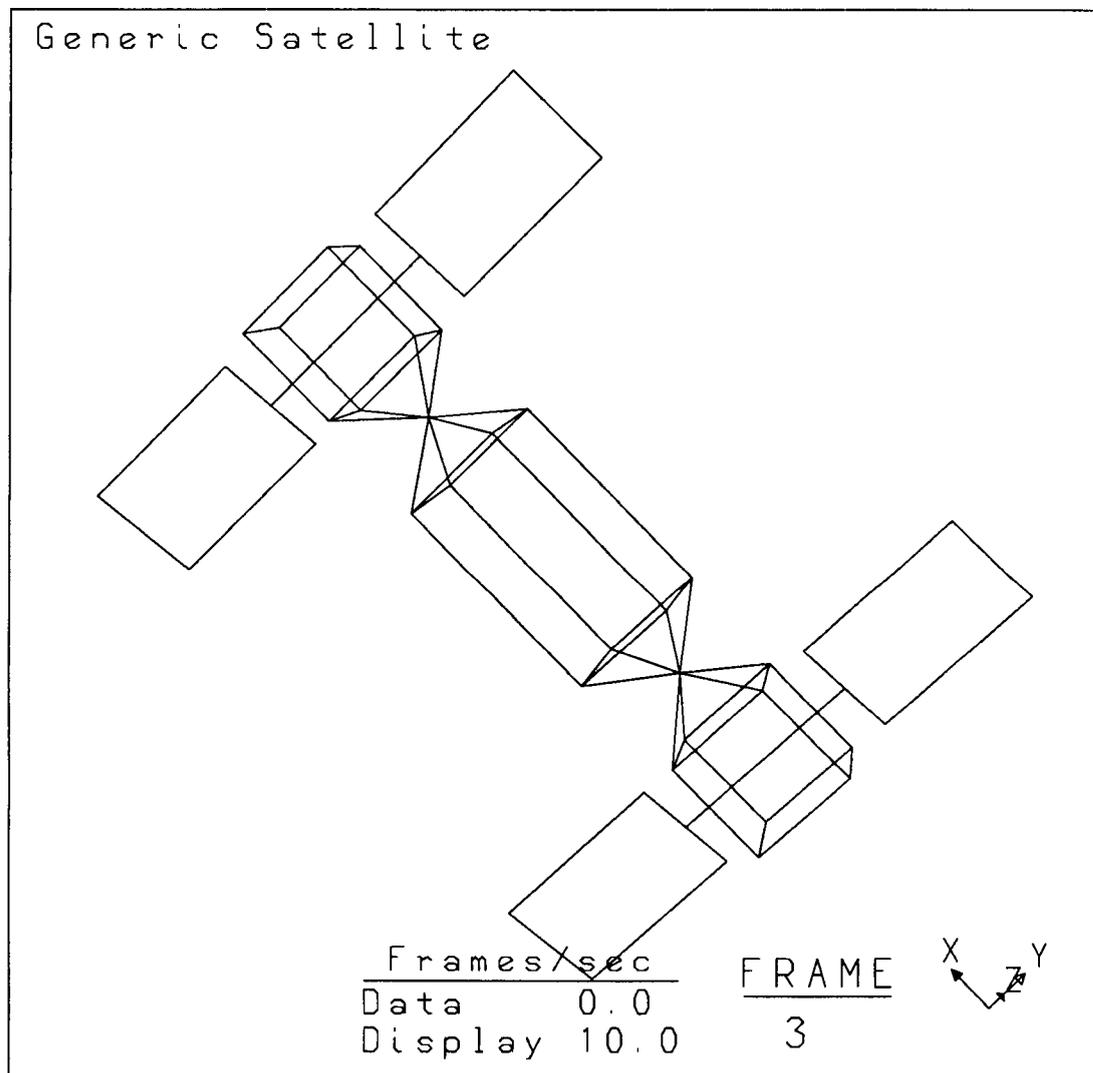

5.7 Example Input Files

Fragments from each of the input files for the previous examples are listed below. The size of these files prevents complete file listings, but the distribution tape does contain the actual files.

TEST.GEO

Scale Model - Analytical
GEO

	27	32	
0 0 1 32			
	1	.000	.000 -150.000
	2	.000	.000 -154.750
	3	.000	.000 -166.750
	4	.000	.000 -178.750
	5	.000	.000 -190.750
	6	.000	.000 -202.750
	7	.000	.000 -214.750
	8	.000	.000 -226.750
	9	.000	.000 -238.750
	10	.000	.000 -250.750
	11	.000	.000 -262.750
	12	.000	.000 -274.750
	13	.000	.000 -275.800
	14	24.000	-.005 -275.800
	15	36.000	20.780 -275.800
	16	24.000	41.565 -275.800
	17	.000	41.565 -275.800
	18	-12.000	20.780 -275.800
	19	12.000	20.780 -275.800
	20	.000	4.000 -191.000
	21	4.000	.000 -191.000
	22	.000	4.000 -237.800
	23	4.000	.000 -237.800
	24	5.000	8.656 -275.800
	25	-6.000	.000 -275.800
	26	.000	-6.000 -275.800
	27	-4.500	-4.500 -275.800
1	2	3	
2	3	4	
3	4	5	
	.		
	.		
30	25	13	
31	26	13	
32	27	13	

TEST.MOD

DATA FROM SPARKS DATABASE

MOD

	10	27	
1	.443		
1	.00000E+00	.00000E+00	.00000E+00
2	-.25004E-05	-.41963E-05	-.14811E-08
3	-.29074E-01	-.48794E-01	-.47036E-06
4	-.10986E+00	-.18437E+00	-.93924E-06
5	-.23389E+00	-.39251E+00	-.14081E-05
6	-.39390E+00	-.66104E+00	-.18620E-05
7	-.58347E+00	-.97916E+00	-.23159E-05
8	-.79690E+00	-.13373E+01	-.27697E-05
9	-.10291E+01	-.17270E+01	-.32236E-05
10	-.12754E+01	-.21403E+01	-.36523E-05
11	-.15315E+01	-.25701E+01	-.40811E-05
12	-.17934E+01	-.30097E+01	-.45098E-05
13	-.18165E+01	-.30484E+01	-.45101E-05
14	-.18165E+01	-.30477E+01	-.52864E+00
15	-.18171E+01	-.30473E+01	-.15647E+01
16	-.18177E+01	-.30477E+01	-.20708E+01
17	-.18177E+01	-.30484E+01	-.15401E+01
18	-.18171E+01	-.30487E+01	-.50406E+00
19	-.18171E+01	-.30480E+01	-.10341E+01
20	-.23724E+00	-.39752E+00	-.80074E-01
21	-.23687E+00	-.39715E+00	-.47715E-01
22	-.10104E+01	-.16951E+01	-.13424E+00
23	-.10101E+01	-.16947E+01	-.79998E-01
24	-.18168E+01	-.30482E+01	-.42993E+00
25	-.18165E+01	-.30485E+01	.13176E+00
26	-.18163E+01	-.30484E+01	.22112E+00
27	-.18164E+01	-.30485E+01	.26466E+00
2	.447		
1	.00000E+00	.00000E+00	.00000E+00
2	.42773E-05	-.25489E-05	-.16861E-09
3	.49685E-01	-.29608E-01	-.53548E-07

·
·
·

TEST.CHY

TEST COLORS
CHY

500 32

20.1

K

4.30000	7.60000	10.90000	14.20000	17.50000
20.80000	24.10000	27.40000	30.70000	34.00000
37.30000	40.59999	43.89999	47.19999	50.49999
53.79999	57.09999	60.39999	63.69999	66.99999
70.30000	73.60000	76.90000	80.20000	83.50001
86.80001	90.10001	93.40002	96.70002	100.0000
103.3000	106.6000	109.9000	113.2000	116.5000
119.8000	123.1000	126.4000	129.7000	133.0000
136.3000	139.6001	142.9001	146.2001	149.5001
152.8001	156.1001	159.4001	162.7001	166.0001
169.3001	172.6001	175.9001	179.2001	182.5001
185.8001	189.1001	192.4001	195.7001	199.0001
202.3001	205.6001	208.9001	212.2001	215.5001
218.8001	222.1001	225.4001	228.7001	232.0001
235.3001	238.6001	241.9001	245.2001	248.5002
251.8002	255.1002	258.4001	261.7001	265.0001
268.3001	271.6001	274.9001	278.2001	281.5001
284.8000	288.1000	291.4000	294.7000	298.0000
301.3000	304.6000	307.9000	311.2000	314.4999
317.7999	321.0999	324.3999	327.6999	330.9999
334.2999	337.5999	340.8998	344.1998	347.4998
350.7998	354.0998	357.3998	360.6998	363.9998

.
. .
.

TEST.MHY

TEST mode history

MHY

600 10

20.1

5.00000	0.00000	0.00000
0.00000	0.00000	0.00000
0.00000	0.00000	0.00000
0.00000		
4.99227	0.00000	0.00000
0.00000	0.00000	0.00000
0.00000	0.00000	0.00000
0.00000		
4.96941	-0.00008	-0.00021
-0.00011	-0.00002	-0.00006
0.00004	-0.00005	0.00000
-0.00009		
4.93181	-0.00033	-0.00078
-0.00041	-0.00009	-0.00020
0.00010	-0.00008	0.00000
-0.00011		
4.87961	-0.00073	-0.00152
-0.00087	-0.00017	-0.00032
0.00011	-0.00004	0.00002
-0.00002		
4.81295	-0.00130	-0.00227
-0.00142	-0.00024	-0.00035
0.00006	-0.00002	0.00002
-0.00007		
4.73206	-0.00202	-0.00306
-0.00200	-0.00029	-0.00026
0.00002	-0.00006	0.00000
-0.00011		
4.63717	-0.00290	-0.00407
-0.00252	-0.00029	-0.00011
0.00004	-0.00006	-0.00001
-0.00004		
4.52859	-0.00394	-0.00540
-0.00292	-0.00026	-0.00001
0.00008	-0.00003	0.00000
-0.00005		
4.40666	-0.00513	-0.00700
-0.00314	-0.00021	-0.00002
0.00008	-0.00004	0.00000
-0.00010		
4.27175	-0.00646	-0.00882
-0.00316	-0.00014	-0.00014
0.00005	-0.00006	0.00000
-0.00006		

.
.
.

TEST.DHY

SCALE DELTA HISTORY FILE NUMBER 1

DHY

100 27

20.1

-4.3500	-6.4500	22.8100
-4.3500	-6.4500	21.0800
-4.3500	-6.4500	16.7300
-4.3500	-6.4500	12.3800
-4.3500	-6.4500	8.0300
-4.3500	-6.4500	3.6800
-4.3500	-6.4500	-0.6700
-4.3500	-6.4500	-5.0200
-4.3500	-6.4500	-9.3700
-4.3500	-6.4500	-13.7200
-4.3500	-6.4500	-18.0700
-4.3500	-6.4500	-22.4300
-4.3500	-6.4500	-22.8100
4.3500	-6.4500	-22.8100
8.7000	1.0900	-22.8100
4.3500	8.6200	-22.8100
-4.3500	8.6200	-22.8100
-8.7000	1.0900	-22.8100
0.0000	1.0900	-22.8100
-4.3500	-5.0000	7.9400
-2.9000	-6.4500	7.9400
-4.3500	-5.0000	-9.0300
-2.9000	-6.4500	-9.0300
-2.5400	-3.3100	-22.8100
-6.5300	-6.4500	-22.8100
-4.3500	-8.6200	-22.8100
-5.9800	-8.0800	-22.8100
-4.3500	-6.4500	22.8100
-4.3500	-6.4500	21.0800
-4.3500	-6.4500	16.7300
-4.3600	-6.4600	12.3800
-4.3700	-6.4800	8.0300
-4.3800	-6.5000	3.6800
-4.3900	-6.5200	-0.6700
-4.4100	-6.5500	-5.0200
-4.4300	-6.5700	-9.3700
-4.4400	-6.6000	-13.7200
-4.4600	-6.6300	-18.0700
-2.9200	-6.4800	7.9400
-4.4200	-5.1200	-9.0400
-2.9700	-6.5700	-9.0300
-2.6700	-3.5300	-22.8400
-6.6600	-6.6700	-22.8000
-4.4800	-8.8500	-22.7900
-6.1100	-8.3000	-22.7900
-4.3500	-6.4500	22.8100

.
. .
.

GEN.GEO

Generic Satellite

GEO

46	70			
4	2	1	20	
1	-5	5	0	
2	-5	5	-5	
3	-5	0	0	
4	-5	0	-5	
	.			
	.			
	.			
44	-15	-10	-2.5	
45	-12.5	-2	-2.5	
46	-12.5	7	-2.5	
1	1	5		
2	2	6		
3	5	7		
	.			
	.			
	.			
68	43	44		
69	44	41		
70	45	46		
1	1	21	36	
1	1	7.5	2.5	-2.5
2	1	37	52	
1	1	-7.5	2.5	-2.5
3	2	53	61	
2	2	12.5	2.5	-2.5
1	1	7.5	2.5	-2.5
4	2	62	70	
2	2	-12.5	2.5	-2.5
1	1	-7.5	2.5	-2.5

GEN.RHY

Generic satellite rotation history

RHY

80 2

.001

-7.820000	-22.53000
-8.450000	-20.62000
-9.070000	-18.70000
-9.670000	-16.78000
-10.25000	-14.84000
-10.81000	-12.90000
-11.36000	-10.95000
-11.89000	-8.990000
-12.40000	-7.020000

.

.

.

-5.850000	331.7900
-6.520000	333.6700
-7.180000	335.5700

GEN.CHY

Generic Satellite Temperature Data 1 orbit

CHY

180 70

0.001

K

0.25860E+03	0.17010E+03	0.25860E+03	0.17010E+03	0.25800E+03
0.25800E+03	0.25800E+03	0.25800E+03	0.23780E+03	0.25830E+03
0.22650E+03	0.25830E+03	0.22650E+03	0.25860E+03	0.17010E+03
0.25860E+03	0.17010E+03	0.25800E+03	0.25800E+03	0.25800E+03
0.25800E+03	0.23780E+03	0.25830E+03	0.22650E+03	0.25830E+03
0.22650E+03	0.25860E+03	0.17010E+03	0.25860E+03	0.17010E+03
0.25800E+03	0.25800E+03	0.25800E+03	0.25800E+03	0.23780E+03
0.25830E+03	0.22650E+03	0.25830E+03	0.22650E+03	0.25860E+03
0.17010E+03	0.25860E+03	0.17010E+03	0.25800E+03	0.25800E+03
0.25800E+03	0.25800E+03	0.23780E+03	0.25830E+03	0.22650E+03
0.25830E+03	0.22650E+03	0.25860E+03	0.17010E+03	0.25860E+03
0.17010E+03	0.25800E+03	0.25800E+03	0.25800E+03	0.25800E+03
0.23780E+03	0.25830E+03	0.22650E+03	0.25830E+03	0.22650E+03
0.17010E+03	0.25860E+03	0.17010E+03	0.25800E+03	0.25800E+03
0.23780E+03	0.22650E+03	0.25830E+03	0.22650E+03	0.17010E+03
0.25860E+03	0.17010E+03	0.25800E+03	0.25800E+03	0.25800E+03
0.25800E+03	0.23780E+03	0.25830E+03	0.22650E+03	0.25830E+03
0.22650E+03	0.25860E+03	0.17010E+03	0.25860E+03	0.17010E+03
0.23780E+03	0.23780E+03	0.23780E+03	0.23780E+03	0.25280E+03
0.25280E+03	0.25800E+03	0.25800E+03	0.17010E+03	0.25860E+03
0.17010E+03	0.25860E+03	0.25830E+03	0.22770E+03	0.25510E+03
0.22770E+03	0.25280E+03	0.25280E+03	0.25800E+03	0.25800E+03
0.17010E+03	0.25860E+03	0.17010E+03	0.25860E+03	0.24190E+03
0.24190E+03	0.25810E+03	0.25390E+03	0.25280E+03	0.25280E+03
0.25800E+03	0.25800E+03	0.17010E+03	0.25860E+03	0.17010E+03

ORIGINAL PAGE IS
OF POOR QUALITY

6.0 Hints and Final Comments

FLEXAN is a design tool to be used in conjunction with analytical computer programs and/or experimental data produced from physical devices such as laboratory instruments. In many applications, very large amounts of data may need to be animated. FLEXAN's FORTRAN array sizes are installation dependent but geometries on the order of 500 nodes and elements are acceptable.

PS300 workstations are configured with varying amounts of main memory and the systems will usually crash if memory is exhausted. The examples presented in this document were run on a four megabyte PS390. The following suggestions may help prevent memory problems:

In general, geometries should be as simple as possible. Try to keep the number elements less than 200.

The maximum number of animation frames is 9999. Two dataset mode or delta history animations of 1200 frames have been performed on a PS390 with four megabytes of memory.

Color history animations require large amounts of memory. Try to keep the number of animation frames below 100 for most color history animations.

Avoid two dataset animations with very large geometries or color history animations.

The superposition window in two dataset animations uses additional memory; avoid using it for large dataset animations.

References

1. Foley, J. D. ; Van Dam, A. : Fundamentals of Interactive Computer Graphics, Addison Wesley, 1982.
2. "Guide to Programming on VAX/VMS (FORTRAN Edition)", Order No. AA-Y503A-TE, Version 4.0, Digital Equipment Corp., September 1984.
3. "PS390 Document Set (E&S #901194-400)" , Version A3.V01, Evans & Sutherland Computer Corp. P. O. Box 8700, 580 Arapeen Dr. Salt Lake City, Utah 84108.



Report Documentation Page

1. Report No. NASA CR-4214	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle FLEXAN (Version 2.0) User's Guide		5. Report Date January 1989	
		6. Performing Organization Code 11910	
7. Author(s) Scott S. Stallcup		8. Performing Organization Report No. TAO 50287	
		10. Work Unit No. 506-49-21-02	
9. Performing Organization Name and Address Computer Sciences Corporation 3217 North Armistead Avenue Hampton, VA 23666		11. Contract or Grant No. NAS1-17999	
		13. Type of Report and Period Covered Contractor Report	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Langley Research Center Hampton, VA 23665-5225		14. Sponsoring Agency Code	
		15. Supplementary Notes Langley Technical Monitors: Athena T. Markos (COTR) Lawrence F. Rowell	
16. Abstract <p>This document describes the FLEXAN (Flexible Animation) computer program, Version 2.0. FLEXAN animates three-dimensional wireframe structural dynamics on the Evans & Sutherland PS300 graphics workstation with a VAX/VMS host computer. Animation options include: unconstrained vibrational modes, mode time histories (multiple modes), delta time histories (modal and/or nonmodal deformations), color time histories (elements of the structure change colors through time), and rotational time histories (parts of the structure rotate through time). Concurrent color, mode, delta, and rotation, time history animations are supported. FLEXAN does not model structures or calculate the dynamics of structures; it only animates data from other computer programs. FLEXAN was developed by Computer Sciences Corporation for the Spacecraft Analysis Branch, NASA Langley Research Center to aid in the study of the structural dynamics of spacecraft.</p>			
17. Key Words (Suggested by Author(s)) COMPUTER ANIMATION MODAL ANALYSIS FINITE ELEMENT ANALYSIS		18. Distribution Statement Unclassified - Unlimited Subject category - 61	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of pages 48	22. Price A03